


## PITreader connector spring load

402307

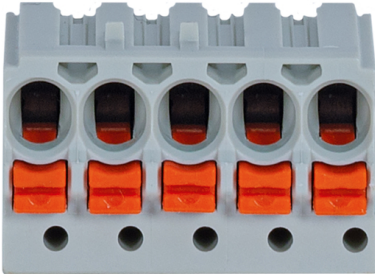

Connector for RFID authentication system: PITreader [402255]. Comprising 1 x 5-pin female connector strip in spring force version, straight cable outlet.

## Technical details

General data	
Approval:	CE
Technical data	
Environmental data	
Ambient temperature:	-20 - 60 °C
Mechanical data	
Net weight:	2 g
Gross weight:	4 g
Environment	
RoHS directive:	2011/65/EU, 2015/863/EU
RoHS conformity:	yes
RoHS exceptions:	no
REACH compliance:	Contains no SVHC substances
WEEE classification (08/2018):	5 devices (feed size < 50cm)
Commercial data	
ECLASS version:	ECLASS-13
ECLASS Reference Feature:	27280492
ETIM Version:	ETIM-9.0
ETIM Reference Group:	EG000017
ETIM Reference Feature:	EC002024

UNSPSC 25:	46211501
GTIN:	4046548093582
Volume:	0 dm3
Harmonized System Code:	85366990
Type of tariff number:	TARIC
Use of customs tariff number:	Ausfuhr, Einfuhr
Quantity per packaging unit:	1