

ARCA 303021



Sample image

Order symbol : ARCA 303021

Product nr : 8120005

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the long side

EAN : 6418074079169

El. number :


- Finland : 3423049
- Denmark : 8212097557
- Sweden : 2506465

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. Door guide included.



ARCA IEC DRS

ARCA IEC IDS

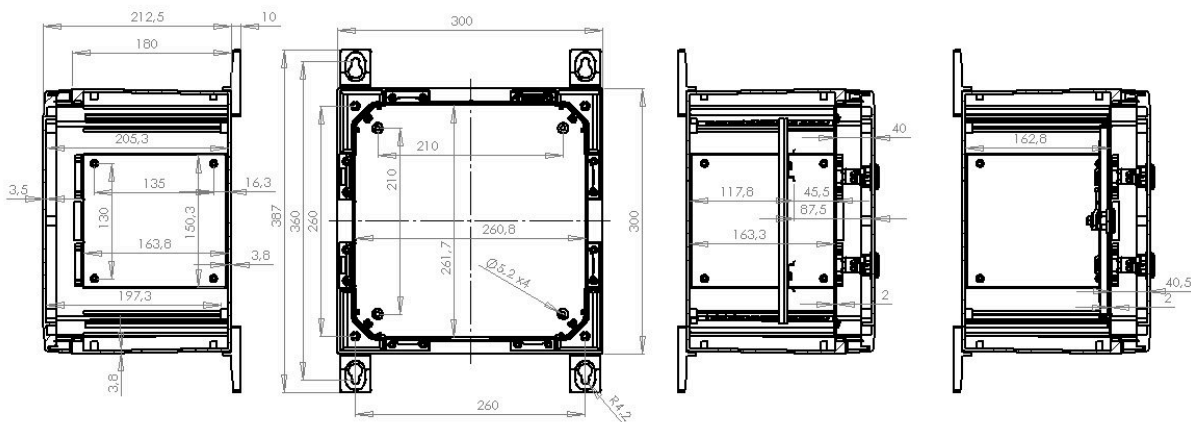

| Dimensions : | Height | Width | Depth |
|---------------------|---------------|--------------|--------------|
| mm : | 300 | 300 | 210 |
| inch : | 11.81 | 11.81 | 8.27 |

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

Accessories :

| | |
|-----------------|--|
| MPX ARCA 3030 | Mounting plate (250x250 mm) (250 x 250 x 5) |
| MPMP ARCA 3030 | Mounting plate multiperforated (250x250x2 mm - ø3.6 mm) (250 x 250 x 1.5) |
| MPS ARCA 3030 | Mounting plate (250x250x2 mm) (250 x 250 x 2) |
| IDS ARCA 3030 | Inner door set (280 x 280 x 30) |
| MPP ARCA 3030 | Mounting plate perforated (250x250x2 mm - 26x11 mm) (250 x 250 x 2) |
| DRS ARCA 303021 | DIN rail frame set (280 x 280 x 30) |
| PMK ARCA 30 | PoleMounting kit, for pole ø100-300mm (385 x 285 x 35) |
| DSP ARCA VLS | Door stopper ARCA, vertical, left, small (15 x 104 x 16) |
| DSP ARCA VRS | Door stopper ARCA, vertical, right, small (15 x 104 x 16) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; |
| Impact Resistance (EN 62262): | IK10; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 5VA |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |
| UL Type | 1, 4, 4X, 12, 13 |