


DISTRIBUTION



B7NFD SERIES

COMPACT NON-FUSED DISCONNECT SWITCHES

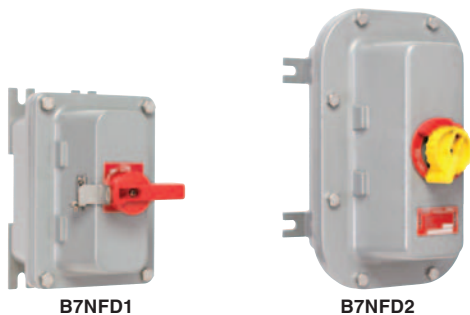

B7NFD1

B7NFD2

Class I, Div. 1 & 2, Groups B, C, D
Class I, Zones 1 & 2, Groups IIB+ H2, IIA
Class II, Div. 1 & 2, Groups E, F, G^①
Class III
NEMA 3, 4, 4X, 7 (B, C, D) 9 (E, F, G)

Certified - File LR11714

FEATURES-SPECIFICATIONS

Applications

The PRISM[®] B7 Series of non-fused disconnect switches are used:

- In locations made hazardous due to the presence of flammable gasses or vapors or ignitable dusts, fibers and flyings.
- Outdoors or indoors in damp, wet and dirty locations, or in areas where frequent washdowns, heavy rain or water spray routinely occurs.
- Use as motor circuit disconnect.

PRISM[®] enclosures universal design accommodates the following manufacturers switches as standard:

- Advance Controls 14046 Series
- Allen-Bradley 194E Series (B7NFD1 only)
- ABB OT Series
- Cutler-Hammer C362N Series
- Sprecher + Schuh LA7 Series
- Ferraz Shawmut LBS Series

Advance Controls © Advance Controls Inc.
 Allen-Bradley © Rockwell Automation
 ABB © The ABB Group
 Cutler-Hammer © Eaton Corporation
 Sprecher + Schuh © Sprecher + Schuh

Features

- Compact size enclosures provide application flexibility with cost savings over industry standard sizes
- Fewer cover bolts reduces installation and maintenance time
- Gasketed flange with O-ring located in side bolt circle to seal out moisture
- Rotary handle style operating mechanism with lockout provision as standard
- Removable ductile mounting lugs adjust to irregular mounting surfaces
- Bodies have top and bottom drilled and tapped conduit entrances for power connection, with custom openings available
- ABB UL98 certified switch supplied for 30-100 Amp units

ADAPTER KIT

- Required for Allen-Bradley and Sprecher + Schuh disconnects Order separately B7KIT - NRW

Standard Materials /Finish

- Enclosures: Copper-free aluminum (less than 4/10 of 1% copper content)
- Cover Bolts: 316 Stainless Steel
- O-ring Gasket: Silicone
- Finish: Grey Powder Polyester painted exterior, electrostatically applied.
- Electrical rating: 600VAC, 30 - 100 Amp


MODIFICATIONS	
SUFFIX NUMBER	DESCRIPTION
KIT-251	100 amp ground lug
SU-2	SU-2 Hinge-9 Installed
SU3*	Drain & Breather installed (NEMA 7CD)
SU3B*	Drain & Breather installed (NEMA 7BCD)
SU9	Special paint finish
A	1 NC+1NO Auxiliary
B7SPNPT	Change std. conduit size and location
SU14	Fungus proofing of enclosures

* NOTE: The installation of a Drain & Breather will void the NEMA 4-4X ratings of enclosure.

CATALOG NUMBER		SWITCH AMPS / PHASE	SINGLE PHASE HP			THREE PHASE HP			DC HP 230VDC	WIRE SIZE**	CONDUIT SIZES
ENCLOSURE ONLY	W/ABB		120VAC	230VAC	208VAC	230VAC	480VAC	600VAC			
B7NFD1	B7NFD13A	30 / 3P	2	5	10	10	20	30	1	#14-10	1 NPT
B7NFD2	B7NFD26A	60 / 3P	3	7.5	20	20	40	40	10	#14-4	1-1/2 NPT
B7NFD2	B7NFD21A	100 / 3P	5	15	25	30	50	50	20	#8-1	1-1/2 NPT

** Use MN. 75°C wire

ENCLOSURE	DIMENSIONS										
	OUTSIDE BOX DIMENSIONS			NOMINAL INSIDE BOX			MOUNTING DIMENSIONS				
	A	B	C	D	E	F	G	H	I	J	K
B7NFD1	5-3/4	8-1/16	6-5/16	3-5/8	5-13/16	5-1/16	3-1/8	8-1/8	-	-	1-1/4
B7NFD2	8-1/8	13-1/16	7-13/16	4-1/4	9-3/16	6-5/16	2-1/2	11-3/8	6-3/8	7-1/2	1-13/16

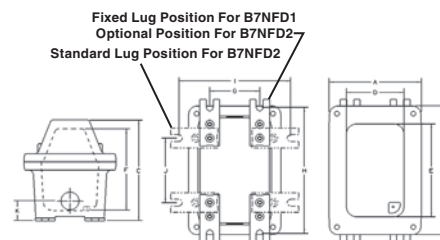

Stock held in the UK by Scattergood & Johnson Ltd. Available for next day delivery.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk