


Data sheet

Order No.: 1792757

Type: MVSTBW 2,5/ 2-ST-5,08

Plug component, Screw connection with tension sleeve

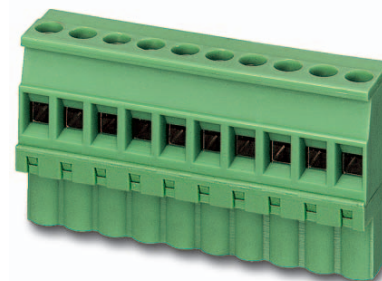

The figure shows a 10-position version of the product

1 Main features



- | | | | |
|---------------------------|--------------------------------------|------------------------|---------------------|
| • Number of positions | 2 | • Nominal current | 12 A |
| • Conductor cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green | • Connection direction | -90 ° |
| • Pitch | 5.08 mm | • Type of packaging | packed in cardboard |
| • Connection method | Screw connection with tension sleeve | | |

2 Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Allows connection of two conductors
- ✓ Low temperature rise, thanks to maximum contact force




Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1792757

1792757 MVSTBW 2,5/ 2-ST-5,08**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Connection capacity.....	4
	5.2 Material data	4
6	Dimensions.....	4
	6.1 Dimensions for the product	5
7	Series drawing.....	6
8	Packaging information	6
9	Application.....	6
	9.1 Temperature limit values	6
10	Mechanical tests.....	7
	10.1 Termination and connection method.....	7
	10.2 Pull-out test	7
11	Electrical tests	8
	11.1 Electrical data	8
	11.2 Air and creepage distances	8
12	Current carrying capacity/derating curves	9
13	Environmental and durability tests	11
	13.1 Vibration test	11
14	Classification for connectors.....	11
15	Approvals	11
16	Commercial Data.....	13
17	corresponding headers.....	13
18	Accessories.....	13
19	Combination tests.....	15

1792757 MVSTBW 2,5/ 2-ST-5,08

4 3D model in PDF can be activated (Acrobat Reader only)

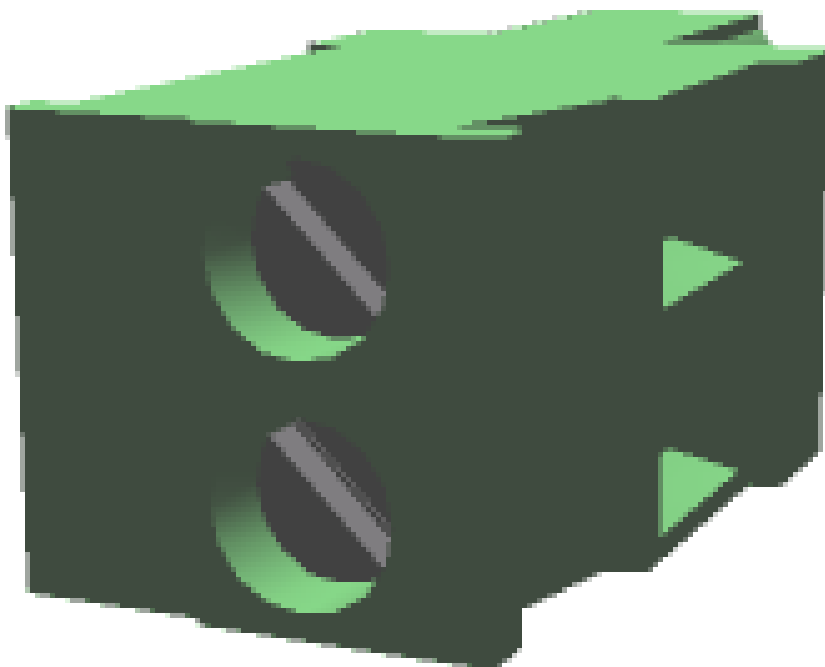

1792757 MVSTBW 2,5/ 2-ST-5,08**5 item properties**

Order No.	1792757
Type	MVSTBW 2,5/ 2-ST-5,08
Type of contact	Female connector
Range of articles	MVSTBW 2,5/...-ST
Pitch	5.08 mm
Number of positions	2
Connection method	Screw connection with tension sleeve
Drive form screw head	Slotted
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm
Locking	without

5.1 Connection capacity

Conductor cross section, solid	0.2 mm ² to 2.5 mm ²
Conductor cross section, flexible	0.2 mm ² to 2.5 mm ²
Conductor cross section AWG/kcmil	24 to 12
2 conductors with same cross section, solid	0.2 mm ² to 1 mm ²
2 conductors with same cross section, stranded	0.2 mm ² to 1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² to 2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.25 mm ² to 2.5 mm ²
2 conductors with same cross section, stranded, with ferrule without plastic sleeve	0.25 mm ² to 1 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules with plastic sleeve	0.5 mm ² to 1.5 mm ²
Cylindrical gauge a x b / diameter	2.8 mm x 2.0 mm / 2.4 mm
Stripping length	7 mm

5.2 Material data

Material of metal parts	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Terminal point surface	Sn 5 µm ... 7 µm
Surface contact area	Sn 5 µm ... 7 µm
Surface characteristics	hot-dip tin-plated
Insulating material data	
Insulating material	PA
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	green (6021)
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

6 Dimensions

1792757 MVSTBW 2,5/ 2-ST-5,08**6.1 Dimensions for the product**

Length	12.5 mm
Width	10.16 mm
Total height	26 mm
Dimension a	5.08 mm

1792757 MVSTBW 2,5/ 2-ST-5,08**7 Series drawing****8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	100

9 Application**9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1792757 MVSTBW 2,5/ 2-ST-5,08**10 Mechanical tests**

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	35 N

10.1 Termination and connection method

Specification	IEC 60999-1:1999-11
Check for damage to conductor or loosening	Test passed

10.2 Pull-out test

Termination and connection method: pull-out test	
Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / stranded / > 10 N
Conductor cross section/conductor type/tractive force actual value	2.5 mm ² / solid / > 50 N
Conductor cross section/conductor type/tractive force actual value	2.5 mm ² / stranded / > 50 N

1792757 MVSTBW 2,5/ 2-ST-5,08**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	2.8 mΩ
Degree of pollution	2

11.2 Air and creepage distances


Component	Plug component		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	250 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	4 mm	3 mm	3.2 mm

1792757 MVSTBW 2,5/ 2-ST-5,08


12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	2.5 mm ²


Type: MVSTBW 2,5/...-ST-5,08 with MDSTB 2,5/...-G-5,08

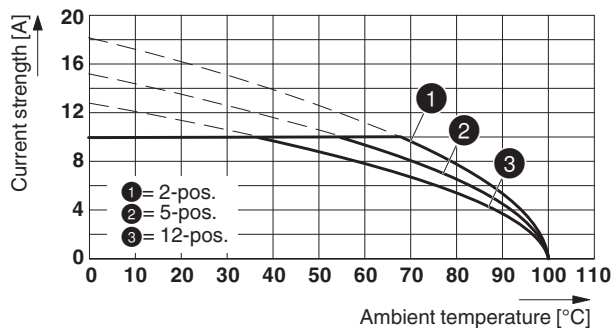

Type: MVSTB(R/W) 2,5/...-ST-5,08 with MDSTBA 2,5/...-G-5,08

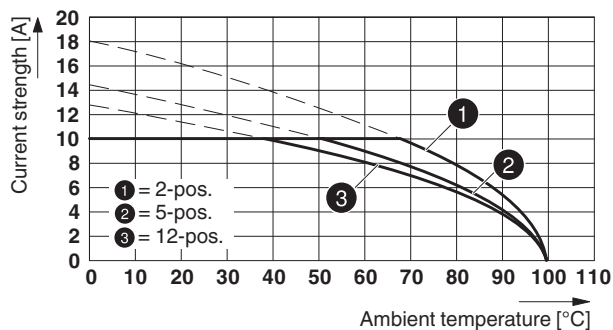


Type: MVSTB(R/W) 2,5/...-ST with MDSTBV 2,5/...-G-5,08

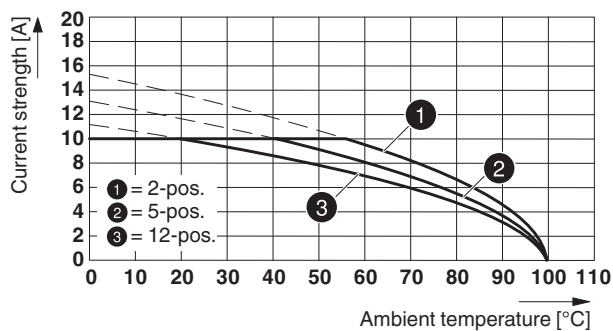

1792757 MVSTBW 2,5/ 2-ST-5,08

Type: MVSTB(R/W) 2,5/...-ST-5,08 with MDSTBW 2,5/...-G-5,08

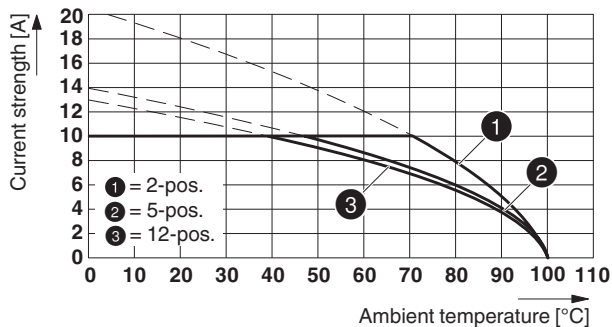

Type: MVSTB(R/W) 2,5/...-ST with MDSTBVA 2,5/...-G-5,08

84900_2000_en

Type: MVSTB(R/W) 2,5/...-ST with MDSTBVA 2,5/...-G-5,08


1792757 MVSTBW 2,5/ 2-ST-5,08**13 Environmental and durability tests****13.1 Vibration test**


Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis


14 Classification for connectors


Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Screw terminal points

15 Approvals

UL Recognized 				
Use group	B	D		
mm ² /AWG/kcmil	30-12	30-12		
Voltage	300 V	300 V		
Current	15 A	10 A		

VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil	0.2-2.5			
Voltage	250 V			
Current	12 A			

cUL Recognized 				
Use group	B	D		
mm ² /AWG/kcmil	30-12	30-12		
Voltage	300 V	300 V		
Current	15 A	10 A		

IECEE CB Scheme 				
mm ² /AWG/kcmil	0.2-2.5			
Voltage	250 V			
Current	12 A			

1792757 MVSTBW 2,5/ 2-ST-5,08

Document revision 0

CSA 

Use group	B	D		
mm ² /AWG/kcmil	28-12	28-12		
Voltage	300 V	300 V		
Current	10 A	10 A		

EAC 

cULus Recognized 

1792757 MVSTBW 2,5/ 2-ST-5,08**16 Commercial Data**

Order No.	1792757
Type	MVSTBW 2,5/ 2-ST-5,08
Pieces per package	100
Net weight	4.3 g
GTIN	4017918045180
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding headers

Order No.	Type
1735882	MSTBW 2,5/ 2-G-5,08
1755736	MSTBVA 2,5/ 2-G-5,08
1757242	MSTBA 2,5/ 2-G-5,08
1758018	MSTBV 2,5/ 2-G-5,08
1759017	MSTB 2,5/ 2-G-5,08
1762062	MDSTB 2,5/ 2-G-5,08
1763074	MDSTBV 2,5/ 2-G-5,08
1767371	SMSTBA 2,5/ 2-G-5,08
1769463	SMSTB 2,5/ 2-G-5,08
1770944	MSTBA 2,5/ 2-G-5,08-LA
1802430	MDSTBW 2,5/ 2-G-5,08
1842063	MDSTBA 2,5/ 2-G-5,08
1845332	MDSTBVA 2,5/ 2-G-5,08
1859519	EMSTBVA 2,5/ 2-G-5,08
1877601	MDSTBA 2,5/ 2-GL-5,08
1877614	MDSTBA 2,5/ 2-GR-5,08
1877627	MDSTBVA 2,5/ 2-GL-5,08
1877630	MDSTBVA 2,5/ 2-GR-5,08
1880300	EMSTBA 2,5/ 2-G-5,08
1898839	DFK-MSTBA 2,5/ 2-G-5,08
1899139	DFK-MSTBVA 2,5/ 2-G-5,08
1902741	MSTBA 2,5/ 2-G-5,08 THT
1902819	MSTBVA 2,5/ 2-G-5,08 THT
1937237	MSTBA 2,5/ 2-G-5,08 THT-R32
1940415	MSTBVA 2,5/ 2-G-5,08 THT-R56
1954388	CC 2,5/ 2-G-5,08 P26THR
1954582	CC 2,5/ 2-G-5,08 P26THRR32
1954919	CCA 2,5/ 2-G-5,08 P26THR
1955031	CCA 2,5/ 2-G-5,08 P26THRR32
1955387	CCV 2,5/ 2-G-5,08 P26THR
1955523	CCV 2,5/ 2-G-5,08 P26THRR32
1955853	CCVA 2,5/ 2-G-5,08 P26THR
1955963	CCVA 2,5/ 2-G-5,08 P26THRR32

18 Accessories

2017-06-01

XX


Document revision 0

1792757 MVSTBW 2,5/ 2-ST-5,08

Description	Order No.	Type
	0805412	SK 5,08/3,8:UNBEDRUCKT
	0804293	SK 5,08/3,8:FORTL.ZAHLEN
Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm	1051993	B-STIFT
Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip	1205053	SZS 0,6X3,5
Coding profile, is inserted into the slot on the plug or inverted header, red insulating material	1734634	CP-MSTB


1792757 MVSTBW 2,5/ 2-ST-5,08

19 Combination tests

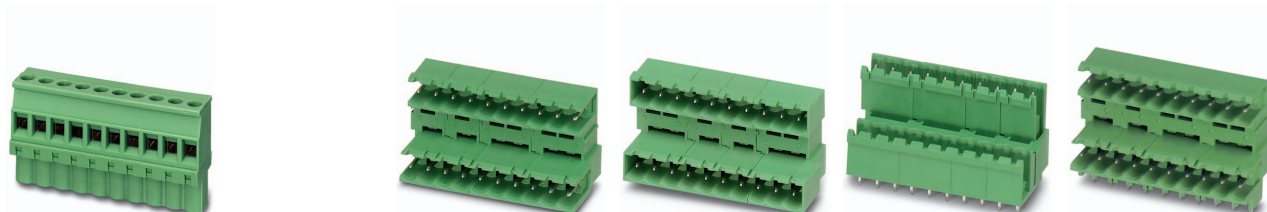

	MVSTBW 2,5/..-ST	MDSTB 2,5/..-G	MDSTBA 2,5/..-G	MDSTBV 2,5/..-G	MDSTBW 2,5/..-G
Specification		IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)					
Insertion/withdrawal force per position		approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N
Polarization when inserted Requirement > 20 N		Test passed	Test passed	Test passed	Test passed
Contact holder in insert Requirements > 20 N		Test passed	Test passed	Test passed	Test passed
Endurance tests (B)					
Contact resistance R ₁		2.8 mΩ	2.7 mΩ	3.8 mΩ	2.8 mΩ
Insertion/withdrawal cycles		25	25	25	25
Contact resistance R ₂		2.8 mΩ	2.8 mΩ	3.7 mΩ	2.8 mΩ
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)		4.8 kV	4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		2.21 kV	2.21 kV	2.21 kV	2.21 kV
Insulation resistance Requirements > 5 MΩ		> 20 GΩ	> 65 GΩ	> 1 GΩ	> 0.2 TΩ
Thermal tests (C)					
Tested number of positions		12	12	12	12
Tested conductor cross section		2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²
Test current		10 A	10 A	10 A	10 A
Upper limiting temperature Requirements < 100°C		Test passed	Test passed	Test passed	Test passed
Climatic tests (D)					
Test sequence 1: low temperature storage		-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h
Test sequence 2: heat storage		100 °C/168 h	100 °C/168 h	100 °C/168 h	100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)		0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)		4.8 kV	4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		2.21 kV	2.21 kV	2.21 kV	2.21 kV
Environmental and endurance tests (E)					
Specification		IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10
Degree of protection		Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger

1792757 MVSTBW 2,5/ 2-ST-5,08



MVSTBW 2,5/..-ST

MSTB 2,5/..-G

MDSTBVA 2,5/..-G

Specification	IEC 61984	IEC 61984		
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 8 N / 6 N	approx. 8 N / 6 N		
Polarization when inserted Requirement > 20 N	Test passed	Test passed		
Contact holder in insert Requirements > 20 N	Test passed	Test passed		
Endurance tests (B)				
Contact resistance R ₁	2.6 mΩ	3.7 mΩ		
Insertion/withdrawal cycles	25	25		
Contact resistance R ₂	2.6 mΩ	3.7 mΩ		
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV		
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV		
Insulation resistance Requirements > 5 MΩ	> 0.2 TΩ	> 0.1 TΩ		
Thermal tests (C)				
Tested number of positions	24	12		
Tested conductor cross section	2.5 mm ²	2.5 mm ²		
Test current	12 A	10 A		
Upper limiting temperature Requirements < 100°C	Test passed	Test passed		
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h		
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h		
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle		
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV		
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV		
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10		
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger		



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk