

<https://www.phoenixcontact.com/gb/products/2863562>

I/O module - ILB PB 24 DI 8 DIO8 - 2863562

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Inline, Block IO, PROFIBUS DP, D-SUB-9 female connector, Digital inputs: 16 , 24 V DC, connection method: 3-wire, Digital outputs: , 24 V DC, 500 mA, connection method: 3-wire, degree of protection: IP20, including Inline connector

Your advantages

- D-SUB bus connection



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 956424
GTIN	4017918956424
Weight per Piece (excluding packing)	334.000 g
Custom tariff number	85389091
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Caption	The figure shows the general dimensional drawing of the Inline Block IO product family
Width	95 mm
Height	141 mm
Depth	57 mm
Note on dimensions	Specifications with connectors

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

I/O module - ILB PB 24 DI 8 DIO8 - 2863562

Technical data

Ambient conditions

Permissible humidity (operation)	85 % (non-condensing)
Permissible humidity (storage/transport)	95 % (non-condensing)
Air pressure (operation)	800 hPa ... 1080 hPa (up to 2000 m above sea level)
Air pressure (storage/transport)	660 hPa ... 1080 hPa (up to 3500 m above sea level)
Degree of protection	IP20

General

Mounting type	DIN rail
Net weight	334 g
Note on weight specifications	with connectors
Mounting type	NS 35/7,5

Interfaces

Designation	PROFIBUS DP
Connection method	D-SUB-9 female connector
Transmission speed	9.6 kbps ... 12 Mbps
Number of positions	9

Digital inputs

Input name	Digital inputs
Description of the input	8 fixed and 8 freely selectable
Connection method	Spring-cage connection
Connection technology	3-wire
Number of inputs	16
Typical response time	approx. 500 µs
Protective circuit	Short-circuit protection, overload protection of the sensor supply
Nominal input voltage U_{IN}	24 V DC
Nominal input current at U_{IN}	5 mA
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	15 V DC ... 30 V DC

Digital outputs

Output name	Digital outputs
Connection method	Spring-cage connection
Connection technology	3-wire
Number of outputs	8
Protective circuit	Short-circuit and overload protection
Output voltage	24 V DC
Nominal output voltage	24 V DC
Maximum output current per channel	500 mA
Maximum output current per module / terminal block	8 A
Maximum output current per module	8 A

<https://www.phoenixcontact.com/gb/products/2863562>

I/O module - ILB PB 24 DI 8 DIO8 - 2863562

Technical data

Digital outputs

Nominal load, inductive	12 VA
Nominal load, lamp	12 W
Nominal load, ohmic	12 W
Limitation of the voltage induced on circuit interruption	approx. -36 V

Electrical isolation

Test section	I/Os / PROFIBUS 500 V AC 50 Hz 1 min.
	I/O area / FE 500 V AC 50 Hz 1 min.
	PROFIBUS / FE 500 V AC 50 Hz 1 min.

Standards and Regulations

Noise emission	Industrial environment
Mechanical tests	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 5g
	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 15g


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


I/O module - ILB PB 24 DI 8 DIO8 - 2863562

Connection diagram

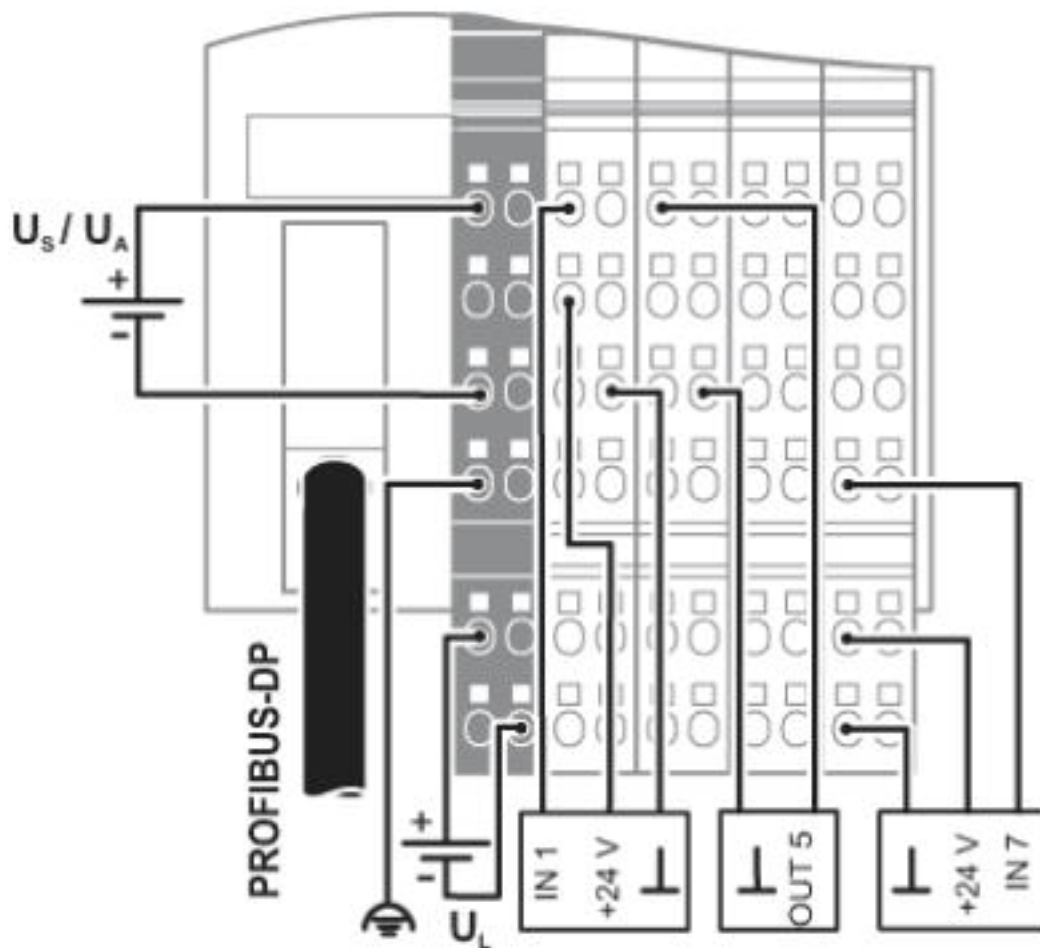

I/O module - ILB PB 24 DI 8 DIO8 - 2863562

Dimensional drawing

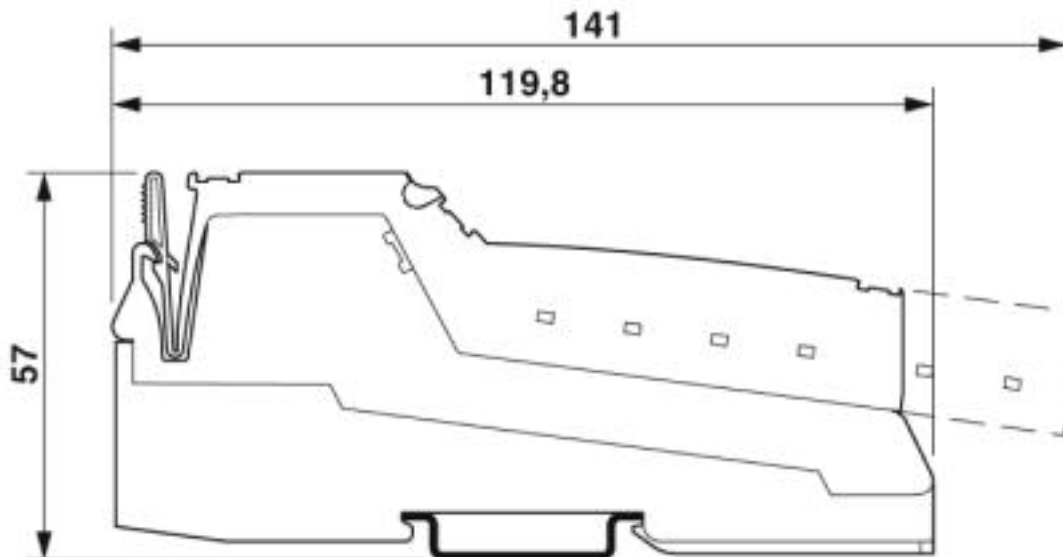

The figure shows the general dimensional drawing of the Inline Block IO product family

Classifications

eCl@ss

eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

ETIM

ETIM 2.0	EC001430
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599
ETIM 6.0	EC001599
ETIM 7.0	EC001599

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404

<https://www.phoenixcontact.com/gb/products/2863562>



I/O module - ILB PB 24 DI 8 DIO8 - 2863562

Classifications

UNSPSC

UNSPSC 13.2	32151602
-------------	----------

Approvals

Approvals

Approvals

PROFIBUS

Ex Approvals

Approval details

PROFIBUS	Z00867
----------	--------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk