

DATASHEET - DS7-340SX135N0-N**Soft starter, 135 A, 200 - 480 V AC, Us= 24 V AC/DC, Frame size FS4**


 Powering Business Worldwide™

Part no. DS7-340SX135N0-N
Catalog No. 134921
Alternate Catalog No. DS7-340SX135N0-N
EL-Nummer (Norway) 0004134206

Delivery program

| | | | |
|-------------------------------------------------------------|----------|------|-------------------------------------|
| Description | | | With internal bypass contacts |
| Function | | | Soft starters for three-phase loads |
| Mains supply voltage (50/60 Hz) | U_{LN} | V AC | 200 - 480 |
| Supply voltage | U_s | | 24 V AC/DC |
| Control voltage | U_C | | 24 V AC 24 V DC |
| Assigned motor rating (Standard connection, In-Line) | | | |
| at 400 V, 50 Hz | P | kW | 75 |
| at 460 V, 60 Hz | P | HP | 100 |
| Rated operational current | | | |
| AC-53 | I_e | A | 135 |
| Rated operational voltage | U_e | | 200 V 230 V 400 V 480 V |
| Connection to SmartWire-DT | | | no |
| Frame size | | | FS4 |

Technical data**General**

| | | | |
|------------------------------------------------|----------|----|-----------------------------------------------------------------------------------|
| Standards | | | IEC/EN 60947-4-2 UL 508 CSA22.2-14 |
| Approvals | | | CE |
| Approvals | | | UL CSA C-Tick UkrSEPRO |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-3 Damp heat, cyclic, to IEC 60068-2-10 |
| Ambient temperature | | | |
| Operation | θ | °C | -5 - +40 up to 60 at 2% derating per Kelvin temperature rise |
| Storage | θ | °C | -25 - +60 |
| Altitude | | m | 0 - 1000 m, above that 1 % derating per 100 m , up to 2000 m |
| Mounting position | | | Vertical |
| Degree of protection | | | |
| Degree of Protection | | | IP20 (terminals IP00) |
| Integrated | | | Protection type IP40 can be achieved on all sides with covers from the NZM range. |
| Protection against direct contact | | | Finger- and back-of-hand proof |
| Overvoltage category/pollution degree | | | II/2 |
| Shock resistance | | | 8 g/11 ms |
| Vibration resistance to EN 60721-3-2 | | | 2M2 |
| Radio interference level (IEC/EN 55011) | | | B |
| Static heat dissipation, non-current-dependent | P_{Vs} | W | 24 |
| Weight | | kg | 3.7 |

Main conducting paths

| | | | |
|-------------------------|----------|------|-----------|
| Rated operating voltage | U_e | V AC | 200 - 480 |
| Supply frequency | f_{LN} | Hz | 50/60 |

| | | | |
|-----------------------------------------------------------------------------|-------|----|-------------------------------|
| Rated operational current | I_e | A | |
| AC-53 | I_e | A | 135 |
| Assigned motor rating (Standard connection, In-Line) | | | |
| at 230 V, 50 Hz | P | kW | 30 |
| at 400 V, 50 Hz | P | kW | 75 |
| at 200 V, 60 Hz | P | HP | 40 |
| at 230 V, 60 Hz | P | HP | 50 |
| at 460 V, 60 Hz | P | HP | 100 |
| Overload cycle to IEC/EN 60947-4-2 | | | |
| AC-53a | | | 135 A: AC-53a: 3 - 5: 75 - 10 |
| Internal bypass contacts | | | ✓ |
| Short-circuit rating | | | |
| Type "1" coordination | | | NZMN2-M160 |
| Type „2" coordination (additional with the fuses for coordination type „1") | | | 3 x 170M4010 |
| Fuse base (number x part no.) | | | 3 x 170H3004 |

Terminal capacities

| | | | |
|----------------------------|--|-----------------|----------------------------------------------------------|
| Cable lengths | | | |
| Solid | | mm ² | 1 x (4 - 185) 2 x (4 - 70) |
| Stranded | | mm ² | 1 x (4 - 185) 2 x (4 - 70) |
| Solid or stranded | | AWG | 1 x (12 - 350 kcmil) 2 x (12 - 00) |
| Copper band | | MM | 2 x 9 x 0.8 10 x 16 x 0.8 |
| Tightening torque | | Nm | 5 ($\leq 10 \text{ mm}^2$); 14 ($> 10 \text{ mm}^2$) |
| Screwdriver (PZ: Pozidriv) | | mm | PZ2; 1 x 6 mm |
| Control cables | | | |
| Solid | | mm ² | 1 x (0.5 - 2.5) 2 x (0.5 - 1.0) |
| Flexible with ferrule | | mm ² | 1 x (0.5 - 1.5) 2 x (0.5 - 0.75) |
| Stranded | | mm ² | 1 x (0.5 - 1.5) 2 x (0.5 - 1.0) |
| Solid or stranded | | AWG | 1 x (21 - 14) 2 x (21 - 18) |
| Tightening torque | | Nm | 0.4 |
| Screwdriver | | mm | 0,6 x 3,5 |

Control circuit

| | | | |
|--------------------------|---------|---------|-------------------------|
| Digital inputs | | | |
| Control voltage | | | |
| DC-operated | | V DC | 24 V DC +10 %/- 15 % |
| AC operated | | V AC | 24 V AC +10 %/- 15 % |
| Current consumption 24 V | | mA | |
| External 24 V | | mA | 1.6 |
| Pick-up voltage | | x U_s | |
| DC-operated | | V DC | 17.3 - 27 |
| AC operated | | V AC | 17.3 - 27 |
| Drop-out voltage | x U_s | | |
| DC operated | | V DC | 0 - 3 |
| AC operated | | V AC | 0 - 3 |
| Pick-up time | | | |
| DC operated | | ms | 250 |
| AC operated | | ms | 250 |
| Drop-out time | | | |
| DC operated | | ms | 350 |
| Regulator supply | | | |
| Voltage | U_s | V | 24 V AC/DC +10 %/- 15 % |

| | | | |
|-------------------------------------------------------------------|------------|------|-------------------------|
| Current consumption | I_e | mA | 50 |
| Current consumption at peak performance (close bypass) at 24 V DC | I_{Peak} | A/ms | 0,6/50 |
| Notes | | | External supply voltage |
| Relay outputs | | | |
| Number | | | 2 (TOR, Ready) |
| Voltage range | | V AC | 250 |
| AC-11 current range | | A | 1 A, AC-11 |

Soft start function

| | | | |
|------------------------------------|--|---|--------------------------------------------------|
| Ramp times | | | |
| Acceleration | | s | 1 - 30 |
| Deceleration | | s | 0 - 30 |
| Start voltage (= turn-off voltage) | | % | 30 100 |
| Start pedestal | | % | 30 - 100 |
| Fields of application | | | |
| Fields of application | | | Soft starting of three-phase asynchronous motors |
| 1-phase motors | | | ● |
| 3-phase motors | | | ✓ |

Functions

| | | | |
|--------------------------------------------------------|--|--|----------------------------|
| Fast switching (semiconductor contactor) | | | - (minimum ramp time 1s) |
| Soft start function | | | ✓ |
| Reversing starter | | | External solution required |
| Suppression of closing transients | | | ✓ |
| Suppression of DC components for motors | | | ✓ |
| Potential isolation between power and control sections | | | ✓ |

Notes

Rated impulse withstand voltage:

- 1.2 μ s/50 μ s (rise time/fall time of the pulse to IEC/EN 60947-2 or -3)
- Applies for control circuit/power section/enclosure

Design verification as per IEC/EN 61439

| | | | |
|------------------------------------------------------------------------------------------------------------------------|------------|----|--------------------------------------------------------------------|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 135 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 24 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 24 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -5 |
| Operating ambient temperature max. | | °C | 40 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |

| | | |
|----------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------|
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Soft starter (EC000640)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Semiconductor motor controller or soft starter (ecl@ss10.0.1-27-37-09-07 [AC0300011])

| | | |
|----------------------------------------------------------------|----|------------------|
| Rated operation current I _e at 40 °C T _u | A | 135 |
| Rated operating voltage U _e | V | 230 - 460 |
| Rated power three-phase motor, inline, at 230 V | kW | 30 |
| Rated power three-phase motor, inline, at 400 V | kW | 75 |
| Rated power three-phase motor, inside delta, at 230 V | kW | 0 |
| Rated power three-phase motor, inside delta, at 400 V | kW | 0 |
| Function | | Single direction |
| Internal bypass | | Yes |
| With display | | No |
| Torque control | | No |
| Rated surrounding temperature without derating | °C | 40 |
| Rated control supply voltage U _s at AC 50HZ | V | 24 - 24 |
| Rated control supply voltage U _s at AC 60HZ | V | 24 - 24 |
| Rated control supply voltage U _s at DC | V | 24 - 24 |
| Voltage type for actuating | | AC/DC |
| Integrated motor overload protection | | No |
| Release class | | Other |
| Degree of protection (IP) | | IP20 |
| Degree of protection (NEMA) | | 1 |

Approvals

| | | |
|--------------------------------------|--|-----------------------------------------------------------------------------------------|
| Product Standards | | IEC/EN 60947-4-2; GB 14048.6; UL 508; CSA-C22.2 No 0-M91; CSA-C22.2 No 14-05 CE marking |
| UL File No. | | E251034 |
| CSA File No. | | 2511305 |
| CSA Class No. | | 321106 |
| Specially designed for North America | | No |
| Suitable for | | Branch circuits |
| Current Limiting Circuit-Breaker | | No |
| Max. Voltage Rating | | 480 V |
| Degree of Protection | | IP20; UL/CSA Type 1 |

Dimensions

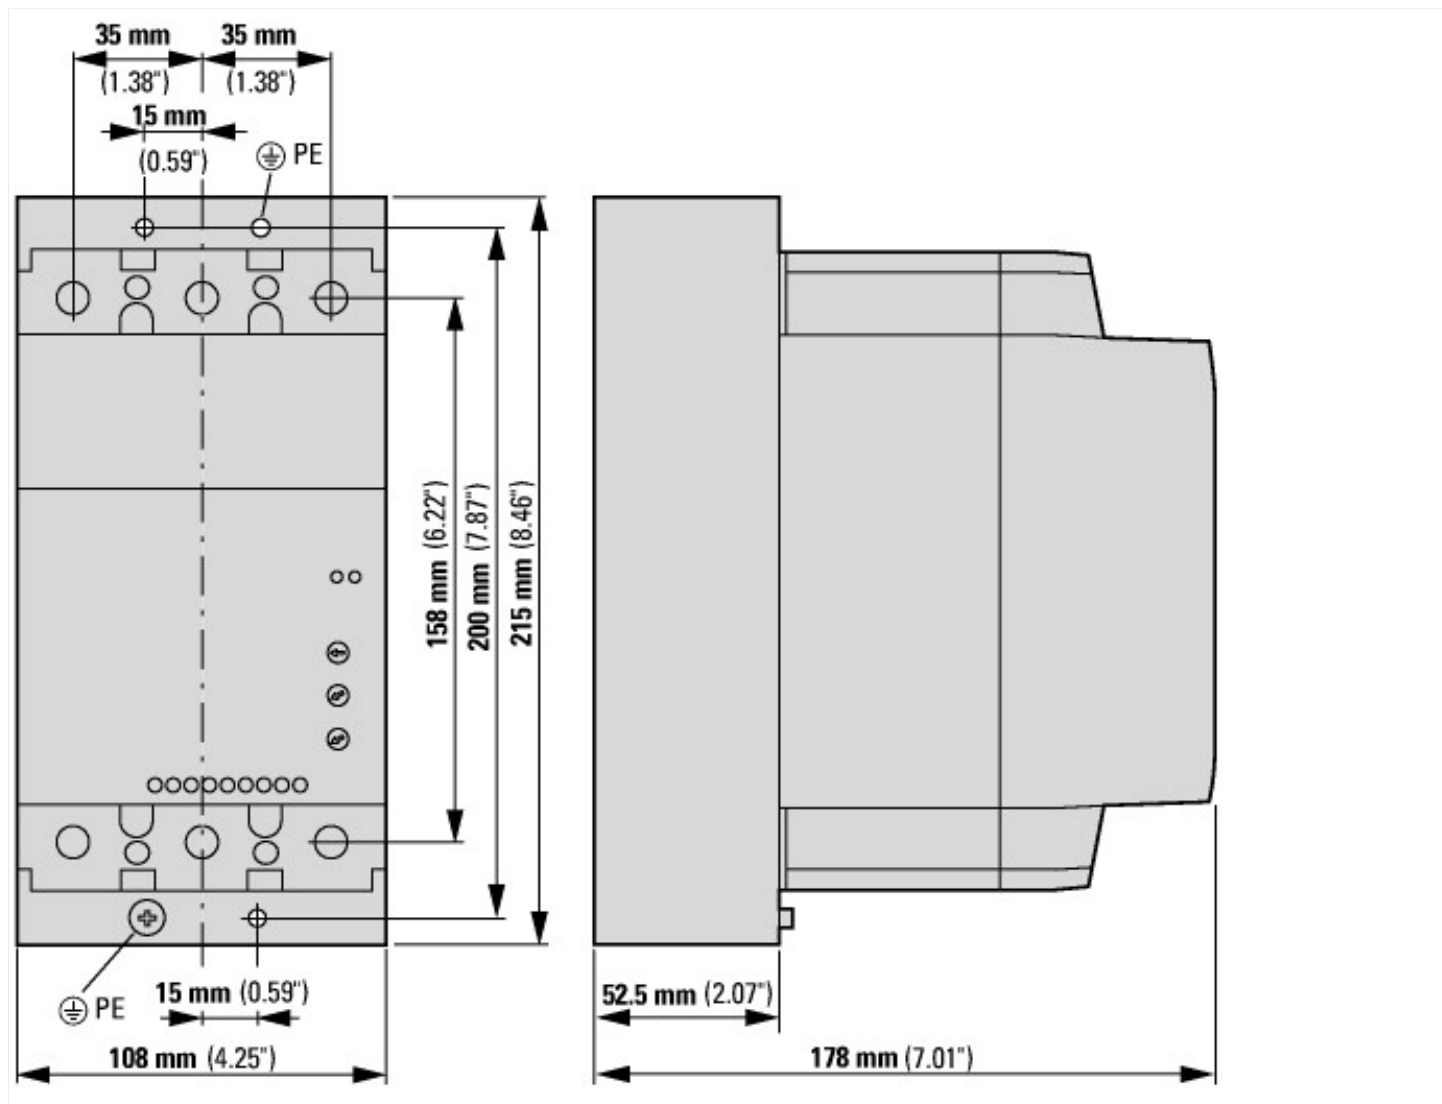



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk