

DATASHEET - NZM1-XHIV



Auxiliary contact, 2early N/O, operates as an early-make contact



Part no. NZM1-XHIV
Catalog No. 259426

EL-Nummer (Norway) 0004358868

Technical data

Auxiliary contacts

Rated operational voltage	U _e	V																																																																																																
Rated operational voltage	U _e	V AC	500																																																																																															
Rated operational voltage, max.	U _e	V DC	220																																																																																															
Conventional thermal current	I _{th} = I _e	CSA	4																																																																																															
Rated operational current	I _e	A																																																																																																
Different rated operational currents when used as auxiliary contact for NZM circuit-breaker			<table border="1"> <thead> <tr> <th></th> <th></th> <th></th> <th>M22-K...</th> <th>M22-CK...</th> <th>XHIV</th> </tr> </thead> <tbody> <tr> <td></td> <td>bei AC = 50/60 Hz</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>Bemessungsbetriebsstrom</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>AC-15</td> <td>I_e</td> <td>A</td> <td>4</td> <td>4</td> <td>4</td> </tr> <tr> <td></td> <td>15 V</td> <td>I_e</td> <td>A</td> <td>4</td> <td>4</td> <td>4</td> </tr> <tr> <td></td> <td>230 V</td> <td>I_e</td> <td>A</td> <td>4</td> <td>4</td> <td>4</td> </tr> <tr> <td></td> <td>400 V</td> <td>I_e</td> <td>A</td> <td>2</td> <td>-</td> <td>2</td> </tr> <tr> <td></td> <td>500 V</td> <td>I_e</td> <td>A</td> <td>1</td> <td>-</td> <td>1</td> </tr> <tr> <td></td> <td>DC-14</td> <td>I_e</td> <td>A</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td></td> <td>14 V</td> <td>I_e</td> <td>A</td> <td>1.7</td> <td>1</td> <td>1.5</td> </tr> <tr> <td></td> <td>42 V</td> <td>I_e</td> <td>A</td> <td>1.2</td> <td>0.8</td> <td>0.8</td> </tr> <tr> <td></td> <td>60 V</td> <td>I_e</td> <td>A</td> <td>0.8</td> <td>0.5</td> <td>0.5</td> </tr> <tr> <td></td> <td>110 V</td> <td>I_e</td> <td>A</td> <td>0.3</td> <td>0.2</td> <td>0.2</td> </tr> <tr> <td></td> <td>220 V</td> <td>I_e</td> <td>A</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				M22-K...	M22-CK...	XHIV		bei AC = 50/60 Hz						Bemessungsbetriebsstrom						AC-15	I _e	A	4	4	4		15 V	I _e	A	4	4	4		230 V	I _e	A	4	4	4		400 V	I _e	A	2	-	2		500 V	I _e	A	1	-	1		DC-14	I _e	A	3	3	3		14 V	I _e	A	1.7	1	1.5		42 V	I _e	A	1.2	0.8	0.8		60 V	I _e	A	0.8	0.5	0.5		110 V	I _e	A	0.3	0.2	0.2		220 V	I _e	A			
			M22-K...	M22-CK...	XHIV																																																																																													
	bei AC = 50/60 Hz																																																																																																	
	Bemessungsbetriebsstrom																																																																																																	
	AC-15	I _e	A	4	4	4																																																																																												
	15 V	I _e	A	4	4	4																																																																																												
	230 V	I _e	A	4	4	4																																																																																												
	400 V	I _e	A	2	-	2																																																																																												
	500 V	I _e	A	1	-	1																																																																																												
	DC-14	I _e	A	3	3	3																																																																																												
	14 V	I _e	A	1.7	1	1.5																																																																																												
	42 V	I _e	A	1.2	0.8	0.8																																																																																												
	60 V	I _e	A	0.8	0.5	0.5																																																																																												
	110 V	I _e	A	0.3	0.2	0.2																																																																																												
	220 V	I _e	A																																																																																															
Short-circuit protection																																																																																																		
max. fuse		A gG/gL	10																																																																																															
Max. miniature circuit-breaker		A	FAZ-B6																																																																																															
Operating times			<p>Early-make time of the HIV compared to the main contacts during with make and break switching.</p> <p>(switch times with manual operation):</p> <p>NZM1, PN1, N(S)1: ca. 20 ms</p> <p>NZM2, PN2, N(S)2: ca. 20 ms</p> <p>NZM3, PN3, N(S)3: ca. 20 ms</p> <p>NZM4, N(S)4: approx. 90 ms, the HIV switch early Offswitching not forward.</p>																																																																																															
Terminal capacities		mm ²																																																																																																
Solid or flexible conductor, with ferrule		mm ²	1 x (0,75 - 2,5) 2 x (0,75 - 2,5)																																																																																															
		AWG	1 x (18 - 14) 2 x (18 - 14)																																																																																															
UL/CSA																																																																																																		
Rated operational current	I _e	A	2.5 A - 240 V AC 1 A - 250 V DC																																																																																															
Heavy Pilot Duty			C300/R300																																																																																															
Other technical data (sheet catalogue)			Maximum equipment and position of the internal accessories Time differences ON-OFF																																																																																															

Design verification as per IEC/EN 61439

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ec@ss10.0.1-27-37-13-02 [AKN342013])			
Number of contacts as change-over contact			0
Number of contacts as normally open contact			2
Number of contacts as normally closed contact			0
Number of fault-signal switches			0
Rated operation current I _e at AC-15, 230 V		A	4
Type of electric connection			Screw connection
Model			Integrable
Mounting method			Other
Lamp holder			None

Approvals

Product Standards			UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.			E140305
UL Category Control No.			DIHS
CSA File No.			022086
CSA Class No.			1437-01
North America Certification			UL listed, CSA certified

Dimensions

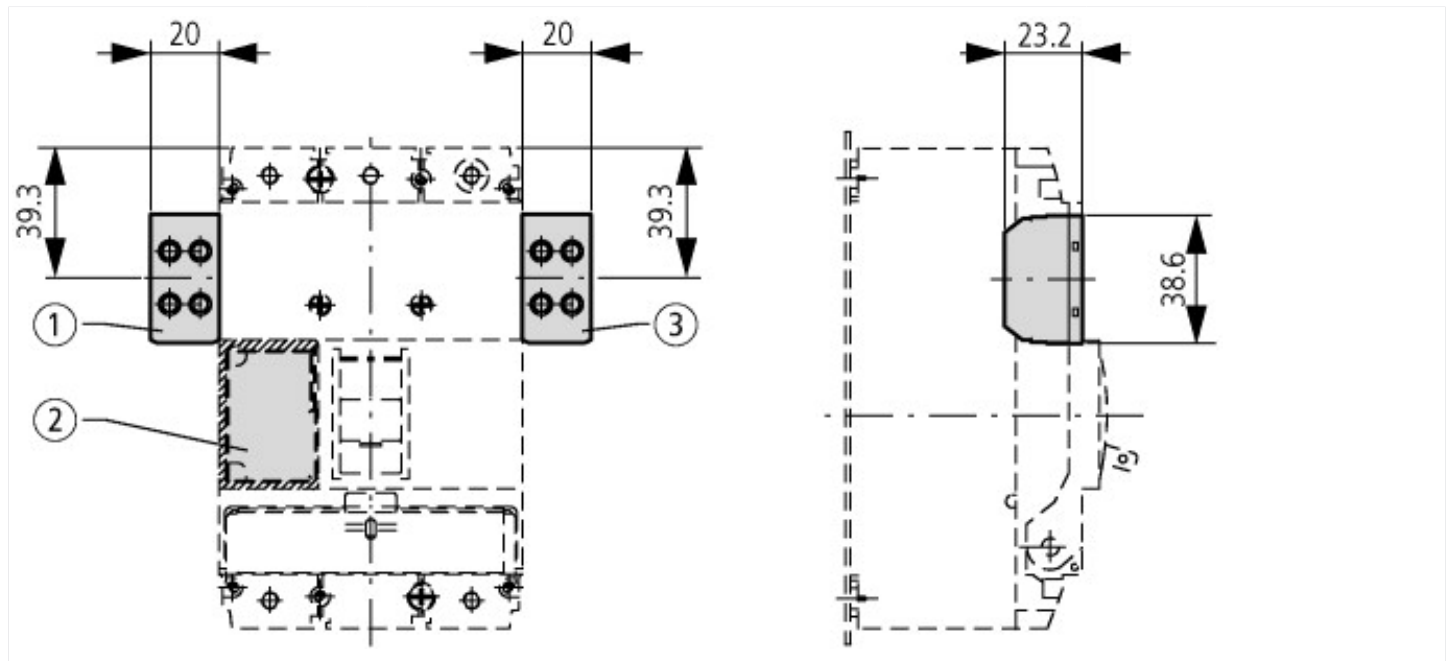



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk