

FBS 3-3,5 GY - Plug-in bridge



3213167

<https://www.phoenixcontact.com/gb/products/3213167>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Plug-in bridge, pitch: 3.5 mm, number of positions: 3, color: gray



Your advantages

- The 2- to 50-pos. jumpers can bridge up to 50 terminal blocks in the two bridge shafts of the CLIPLINE complete system in one step

Commercial Data

Item number	3213167
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE2Z2X
Product Key	BE2Z2X
Catalog Page	Page 403 (C-1-2019)
GTIN	4046356594417
Weight per Piece (including packing)	1.06 g
Weight per Piece (excluding packing)	0.977 g
Customs tariff number	85366990
Country of origin	DE

FBS 3-3,5 GY - Plug-in bridge



3213167

<https://www.phoenixcontact.com/gb/products/3213167>

Technical Data

Product properties

Product type	Jumper
Number of positions	3
Pitch	3.5 mm

Electrical properties

Maximum load current	17.5 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
----------------------	---

Connection data

Maximum load current	17.5 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
----------------------	---

Dimensions

Pitch	3.5 mm
-------	--------

Material specifications

Color	gray
Material	Copper
Flammability rating according to UL 94	V0
Insulating material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	Plug-in mounting
---------------	------------------


FBS 3-3,5 GY - Plug-in bridge

3213167

<https://www.phoenixcontact.com/gb/products/3213167>

Drawings

Schematic diagram

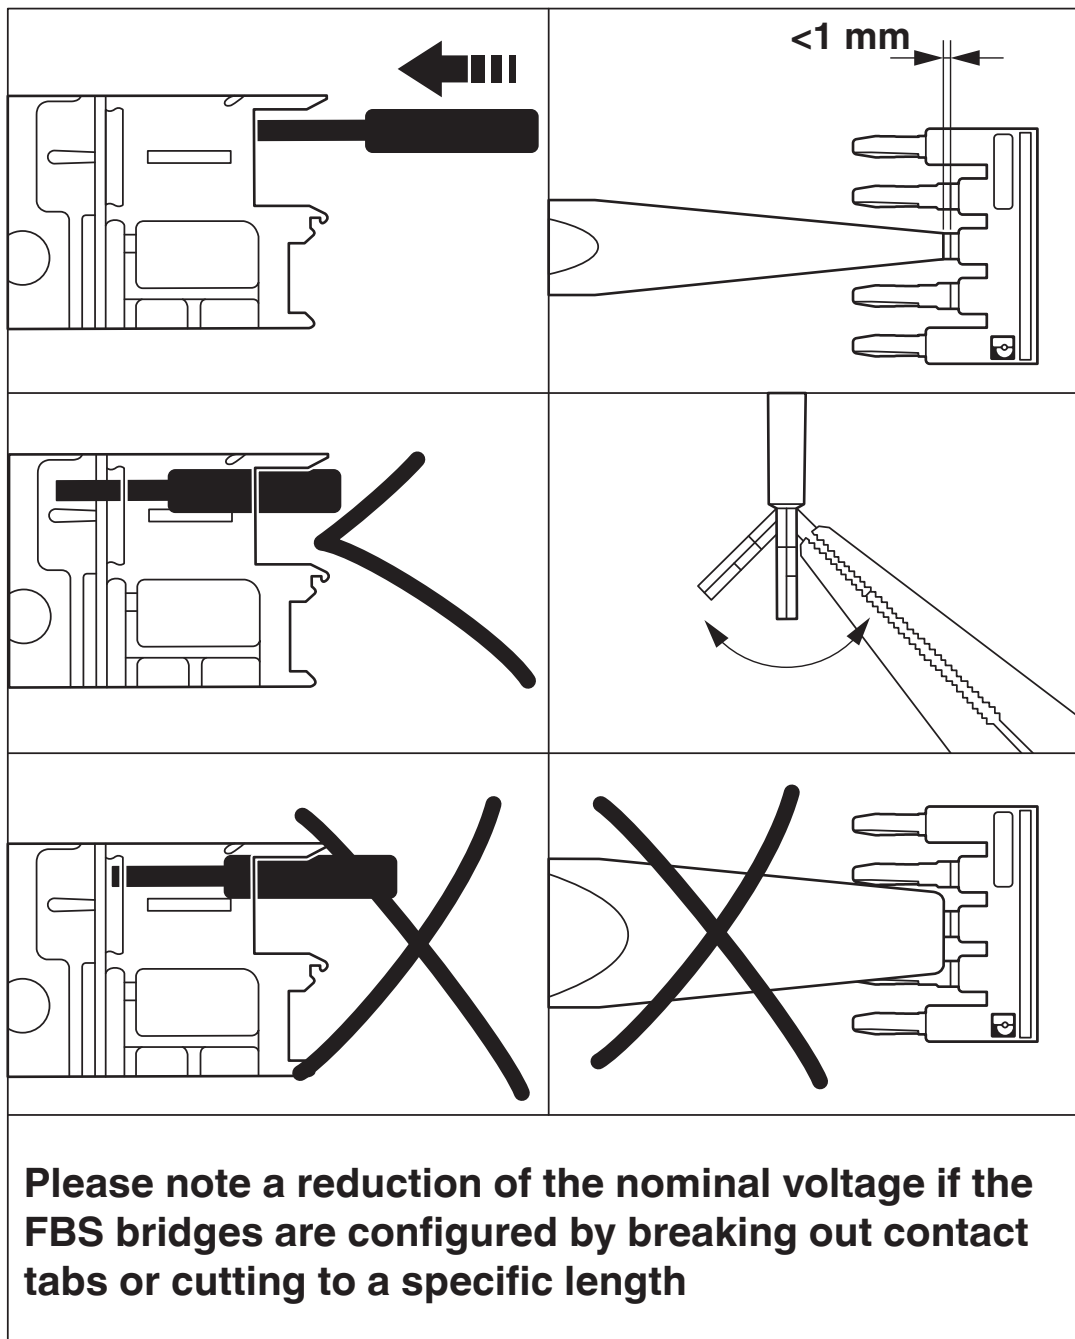

FBS 3-3,5 GY - Plug-in bridge



3213167

<https://www.phoenixcontact.com/gb/products/3213167>

Classifications

ECLASS

ECLASS-11.0	27141140
ECLASS-12.0	27141140
ECLASS-13.0	27250303

ETIM

ETIM 8.0	EC000489
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

FBS 3-3,5 GY - Plug-in bridge

3213167

<https://www.phoenixcontact.com/gb/products/3213167>

Environmental Product Compliance

China RoHS

Environmentally friendly use period: unlimited = EFUP-e

No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk