



# WSE12-3P2431

## W12-3

SMALL PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type         | Part no. |
|--------------|----------|
| WSE12-3P2431 | 1041459  |

**Included in delivery:** BEF-KH-W12 (2)

Other models and accessories → [www.sick.com/W12-3](http://www.sick.com/W12-3)

### Detailed technical data

#### Features

|                                             |                                         |
|---------------------------------------------|-----------------------------------------|
| <b>Functional principle</b>                 | Through-beam photoelectric sensor       |
| <b>Sensing range max.</b>                   | 0 m ... 20 m                            |
| <b>Sensing range</b>                        | 0 m ... 15 m                            |
| <b>Emitted beam</b>                         |                                         |
| Light source                                | LED <sup>1)</sup>                       |
| Type of light                               | Visible red light                       |
| Light spot size (distance)                  | Ø 220 mm (15 m)                         |
| <b>Key LED figures</b>                      |                                         |
| Wave length                                 | 640 nm                                  |
| <b>Adjustment</b>                           | Potentiometer, 5 turns                  |
| <b>Angle of dispersion</b>                  | Approx. 1.5°                            |
| <b>Items supplied</b>                       | 2 x clamps BEF-KH-W12, incl. screws     |
| <b>Part number of individual components</b> | 2041879 WS12-3D2430 2041881 WE12-3P2431 |

<sup>1)</sup> Average service life: 100,000 h at T<sub>J</sub> = +25 °C.

#### Safety-related parameters

|                         |           |
|-------------------------|-----------|
| <b>MTTF<sub>D</sub></b> | 826 years |
| <b>DC<sub>avg</sub></b> | 0 %       |

## Electrical data

|                                        |                                                       |
|----------------------------------------|-------------------------------------------------------|
| <b>Supply voltage <math>U_B</math></b> | 10 V DC ... 30 V DC <sup>1)</sup>                     |
| <b>Ripple</b>                          | < 5 V <sub>pp</sub> <sup>2)</sup>                     |
| <b>Current consumption, sender</b>     | ≤ 30 mA <sup>3)</sup>                                 |
| <b>Current consumption, receiver</b>   | ≤ 15 mA <sup>3)</sup>                                 |
| <b>Protection class</b>                | III                                                   |
| <b>Digital output</b>                  |                                                       |
| Type                                   | PNP                                                   |
| Signal voltage PNP HIGH/LOW            | > U <sub>v</sub> - 2,5 V / ca. 0 V                    |
| Output current I <sub>max.</sub>       | ≤ 100 mA                                              |
| Response time                          | ≤ 330 μs <sup>4)</sup>                                |
| Switching frequency                    | 1,500 Hz <sup>5)</sup>                                |
| <b>Switching mode</b>                  | Light/dark switching                                  |
| <b>Output function</b>                 | Complementary                                         |
| <b>Circuit protection</b>              | A <sup>6)</sup><br>C <sup>7)</sup><br>D <sup>8)</sup> |
| <b>Test input sender off</b>           | TE to 0 V                                             |

<sup>1)</sup> Limit values when operated in short-circuit protected network: max. 8 A.

<sup>2)</sup> May not exceed or fall below U<sub>v</sub> tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> Signal transit time with resistive load.

<sup>5)</sup> With light/dark ratio 1:1.

<sup>6)</sup> A = V<sub>S</sub> connections reverse-polarity protected.

<sup>7)</sup> C = interference suppression.

<sup>8)</sup> D = outputs overcurrent and short-circuit protected.

## Mechanical data

|                               |                           |
|-------------------------------|---------------------------|
| <b>Housing</b>                | Rectangular               |
| <b>Dimensions (W x H x D)</b> | 15.6 mm x 48.5 mm x 42 mm |
| <b>Connection</b>             | Male connector M12, 4-pin |
| <b>Material</b>               |                           |
| Housing                       | Metal                     |
| Front screen                  | Plastic, PMMA             |
| <b>Weight</b>                 | 120 g                     |

## Ambient data

|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Enclosure rating</b>              | IP66<br>IP67<br>IP69K        |
| <b>Ambient operating temperature</b> | -40 °C ... +60 °C            |
| <b>Ambient temperature, storage</b>  | -40 °C ... +75 °C            |
| <b>UL File No.</b>                   | NRKH.E181493 & NRKH7.E181493 |


## Classifications

|                   |          |
|-------------------|----------|
| <b>eCl@ss 5.0</b> | 27270901 |
|-------------------|----------|

|                       |          |
|-----------------------|----------|
| <b>eCl@ss 5.1.4</b>   | 27270901 |
| <b>eCl@ss 6.0</b>     | 27270901 |
| <b>eCl@ss 6.2</b>     | 27270901 |
| <b>eCl@ss 7.0</b>     | 27270901 |
| <b>eCl@ss 8.0</b>     | 27270901 |
| <b>eCl@ss 8.1</b>     | 27270901 |
| <b>eCl@ss 9.0</b>     | 27270901 |
| <b>eCl@ss 10.0</b>    | 27270901 |
| <b>eCl@ss 11.0</b>    | 27270901 |
| <b>eCl@ss 12.0</b>    | 27270901 |
| <b>ETIM 5.0</b>       | EC002716 |
| <b>ETIM 6.0</b>       | EC002716 |
| <b>ETIM 7.0</b>       | EC002716 |
| <b>ETIM 8.0</b>       | EC002716 |
| <b>UNSPSC 16.0901</b> | 39121528 |


### Adjustments

WL12-3, WSE12-3

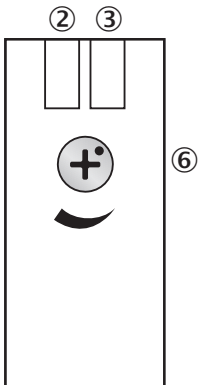


- ② LED indicator yellow: Status of received light beam
- ③ LED indicator green: Supply voltage active
- ⑥ Sensitivity control: potentiometer

### Connection type




### Connection diagram

Cd-072

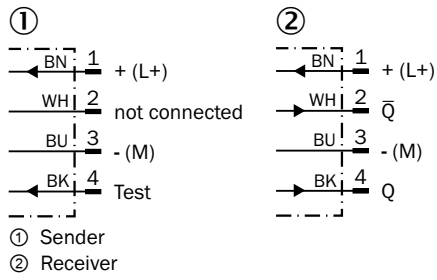


### Characteristic curve

WSE12-3

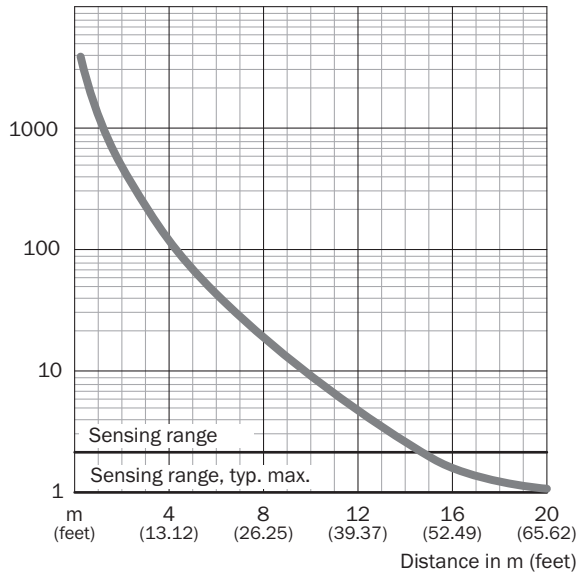


### Sensing range diagram

WSE12-3

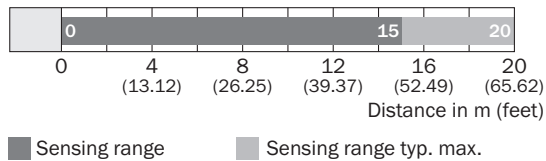

### Dimensional drawing (Dimensions in mm (inch))

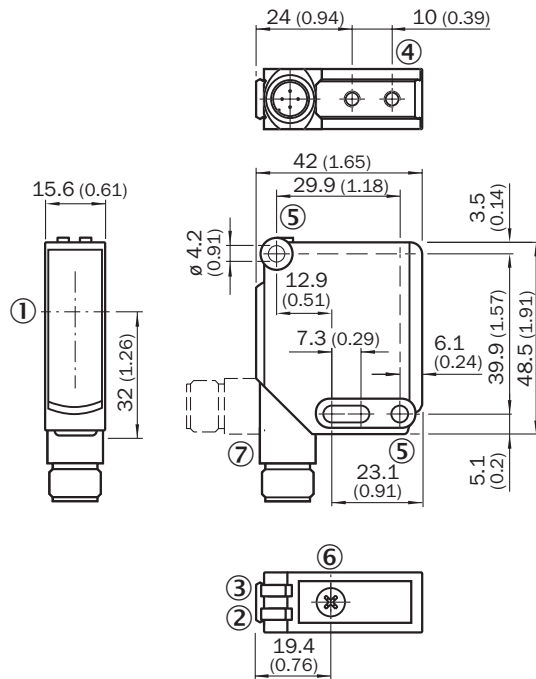

WL12-3, WSE12-3



- ① Optical axis
- ② LED indicator yellow: Status of received light beam
- ③ LED indicator green: Supply voltage active
- ④ M4 threaded mounting hole, 4 mm deep
- ⑤ Mounting hole,  $\varnothing$  4.2 mm
- ⑥ Sensitivity control: potentiometer
- ⑦ Connection

### Recommended accessories

Other models and accessories → [www.sick.com/W12-3](http://www.sick.com/W12-3)

|                                                                                     | Brief description                                                                                                                     | Type               | Part no. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Plug connectors and cables                                                          |                                                                                                                                       |                    |          |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YF2A14-050VB3XLEAX | 2096235  |
|  | Head A: male connector, M12, 4-pin, straight<br>Cable: unshielded                                                                     | STE-1204-G         | 6009932  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)