



Product designation

Product type designation

Description

Accessories for

**Auxiliary contact characteristics**

Rated insulation voltage $U_i$ IEC/EN	V	690
---------------------------------------	---	-----

Rated impulse withstand voltage $U_{imp}$	kV	4
---	----	---

**Operational characteristics**


IEC maximum current ( $I_{max}$ )	A	63
-----------------------------------	---	----

**Mechanical features**

Weight	g	28
--------	---	----

**Dimensions [mm (in)]**

Three-phase connection busbars 45mm/1.77" spacing  
 11SMX  
 Three-phase connection busbars 45mm/1.77" spacing  
 SM1P..., SM1R...

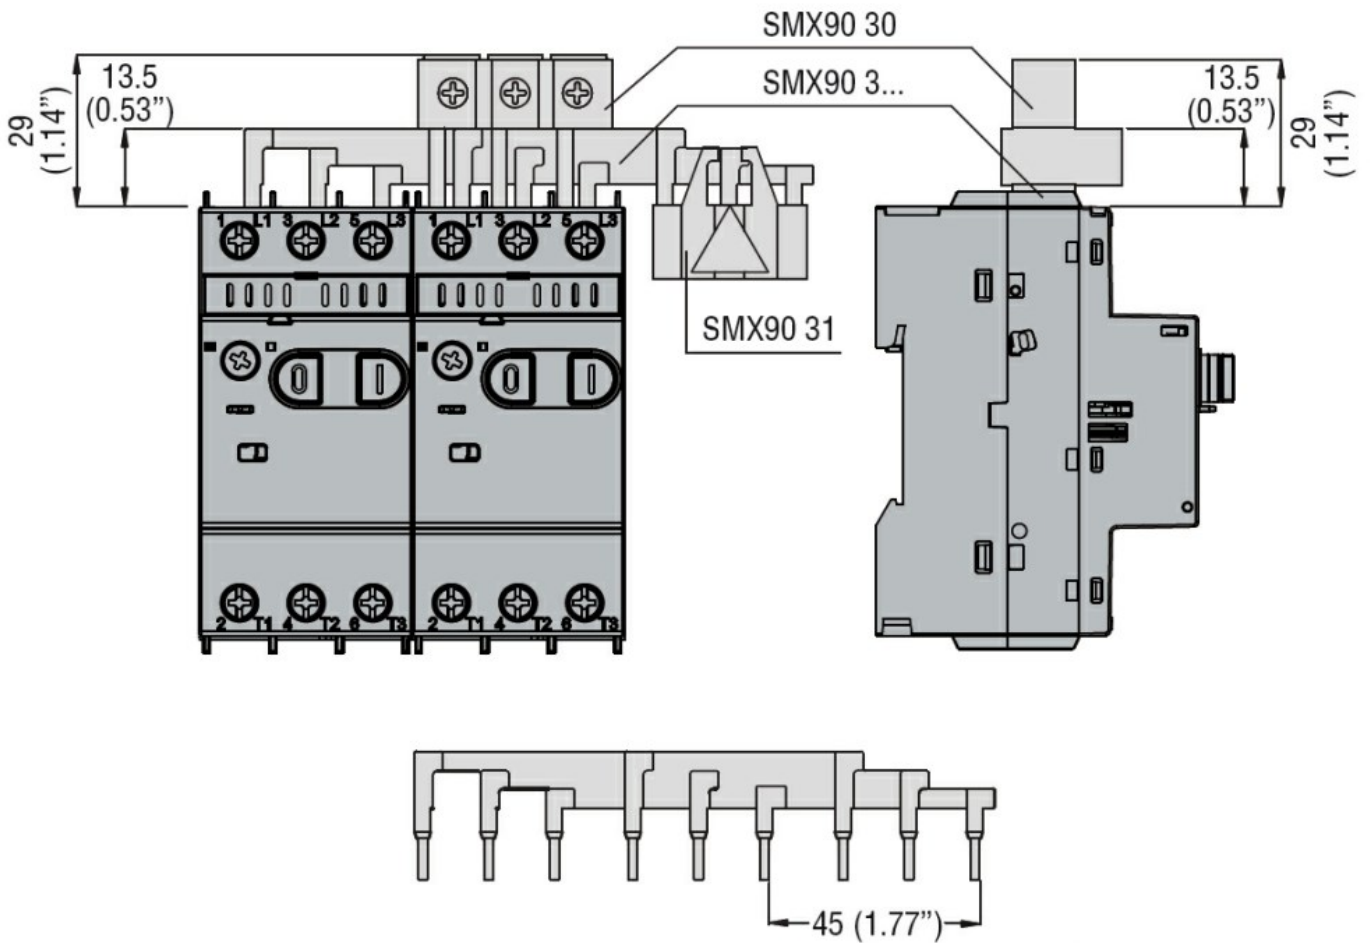

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

cULus

EAC

### ETIM classification