


**TS 35X15/6X18 2M/ST/ZN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

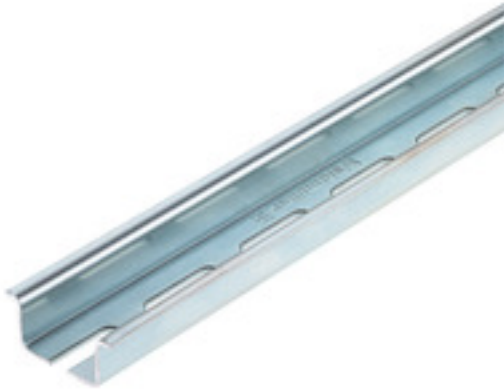**Product image**

Similar to illustration

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

**General ordering data**

Version	Terminal rail, with slot, Accessories, 35 x 15 x 2000 mm, Slit width: 6.30 mm, Slit length: 18.00 mm, Steel, galvanic zinc plated and passivated
Order No.	<a href="#">1805980000</a>
Type	TS 35X15/6X18 2M/ST/ZN
GTIN (EAN)	4032248274536
Qty.	2 m

Creation date 09 July 2024 16:25:55 CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

## TS 35X15/6X18 2M/ST/ZN

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

Depth	15 mm	Depth (inches)	0.591 inch
Height	35 mm	Height (inches)	1.378 inch
Width	2,000 mm	Width (inches)	78.74 inch
Net weight	620 g		

### Mounting rail

Installation advice Direct mounting

Length of the terminal rail	nominal	2,000 mm
	max.	2,000 mm
	min.	0 mm

Material Steel

Pre-punched mounting rail Yes

Short circuit strength corresponds to E-Cu wire 50 mm<sup>2</sup>

Short-time withstand current per second according to IEC 60947-7-2 6 kA

Slit gap 7 mm

Slit gap

Slit length 18 mm

Slit length

Slit width 6.3 mm

Slit width

Standards In accordance with DIN EN 60715

Surface finish galvanic zinc plated and passivated

Thickness 1.5 mm

### Classifications

ETIM 6.0	EC001285	ETIM 7.0	EC001285
ETIM 8.0	EC001285	ETIM 9.0	EC001285
ECLASS 9.0	27-40-06-02	ECLASS 9.1	27-40-06-02
ECLASS 10.0	27-40-06-02	ECLASS 11.0	27-40-06-02
ECLASS 12.0	27-40-06-02	ECLASS 13.0	27-40-06-02

### Environmental Product Compliance

REACH SVHC /

### Approvals

ROHS Conform

### Downloads

Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">Zuken E3.S</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

**Data sheet**



**TS 35X15/6X18 2M/ST/ZN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Product image**

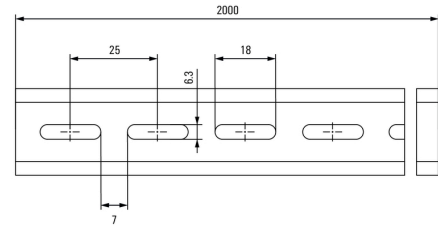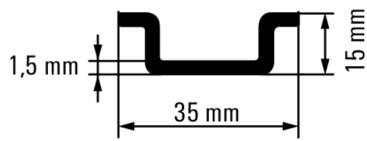

Similar to illustration